

TURBO MINI SCOUTLIGHT PRO

COMPACT DUAL FUEL HIGH-CANDELA WEAPONLIGHT



650* LUMENS



95,000* CANDELA



45* MINUTES



616* METERS



TURBO
BEAM PATTERN



DUAL FUEL



RECHARGEABLE



IPX7

DESCRIPTION

SureFire's Scout Light Pro series rewrote the rules of WeaponLight versatility. The M340DFT combines high-candela performance and dual-fuel capability. The M340DFT delivers the farthest-reaching beam of any SureFire long gun WeaponLight in a compact form factor. As a result, it is ideal for long-range target identification.

The M340DFT projects a peak beam intensity of 95,000 candela, using the included SF18350 rechargeable lithium-ion battery, or 55,000 candela with a single 123A primary battery. It offers tremendous versatility by also providing ample spill light for situational awareness without sacrificing long-range performance.

The Scout Light Pro Low-Profile Mount (LPM) delivers unprecedented versatility, allowing the user to optimize the light's position relative to the rail and other attached firearm accessories. Rugged and reliable, the LPM easily and securely attaches to any MIL-STD-1913 or M-LOK rail.

Constructed of lightweight aerospace aluminum, Mil-Spec hard-anodized, and O-ring sealed to keep out the elements, the M340DFT Scout Light Pro is the best-performing, most feature-rich, WeaponLight for its size.

FEATURES

- Precision reflector produces a high-candela, far-reaching beam ideal for target identification at long distances
- Versatile Low-Profile Mount (LPM) allows the user to optimize the light's position relative to the rail and other attached firearm accessories
- Mil-Spec hard-anodized aluminum body and tempered window make it light rugged, durable and combat ready
- Activation via ZE68 momentary/constant-on pushbutton switching with protective shroud
- Compatible with a host of remote tape switches
- Meets IPX7 waterproof test standard at 1 meter for 30 minutes



SPECIFICATIONS

	M340DFT	
COLOR		
OUTPUT*	18350: 650	123A: 350 lumens
RUNTIME*	18350: 45 min	123A: 1 hour
PEAK BEAM INTENSITY*	18350: 95,000	123A: 55,000 candela
DISTANCE*	18350: 616	123A: 469 meters
CONSTRUCTION	Aluminum	
FINISH	Hard Anodized (MIL-A-8625 Type III, Class 2)	
WEIGHT (w/batteries)	5.11 oz (144.9 g)	
LENGTH	4.8 in (12.2 cm)	
BEZEL DIAMETER	1.258 in (3.2 cm)	
BATTERIES	One SF18350 (incl) or One 123A	
SWITCHING	Click tailcap	

All performance claims tested to ANSI/PLATO FL1-2019 Standard.

*SF18350 battery required for 550 lumen output, 71,000 candela, 45 minutes runtime, and 533 meter beam distance

PART# / UPC

M340DFT-BK-PRO	084871331555
M340DFT-TN-PRO	084871331562




THE WORLD'S FINEST ILLUMINATION TOOLS, SUPPRESSORS, & TACTICAL PRODUCTS™

18300 Mt. Baldy Circle, Fountain Valley, CA 92708 | 714-545-9444 | Fax: 714-545-9537 | surefire.com

Actual product may vary from photo. Prices and specifications subject to change without notice. | Export of the product(s) shown herein must comply with the appropriate U.S. Government Jurisdiction(s) and Regulation(s).

©2022 SureFire, LLC JUN

PACKAGING SPECS



TYPE	Box - Kraft Stock
HEIGHT	8 in (20.3 cm)
WIDTH	4.75 in (12.1 cm)
DEPTH	1.75 in (4.4 cm)

FEATURED ACCESSORIES



123A LITHIUM BATTERIES


Available in 2, 6, 12-packs and bulk options



SC1 SPARE BATTERY CARRIER

Other appropriate models also available

BODY SPECS

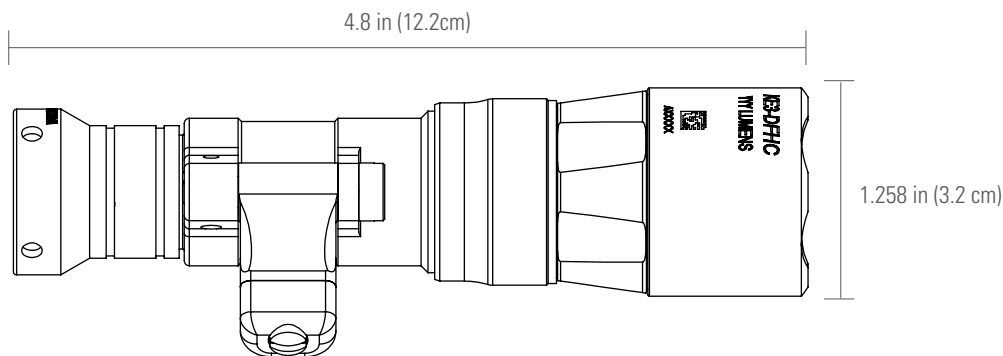

BATTERY SPECS

SF18350B	RATING/PERFORMANCE
TYPE	18350 w/micro USB Charger and PCM
VOLTAGE	3.7V
CERTIFICATION	UN38.3
CHARGE END VOLTAGE	4.2V
CHEMISTRY	Lithium-Ion
DIMENSIONS	39.8±0.3 mm x 18.6±0.3 mm
DISCHARGE END VOLTAGE	2.5V
DISCHARGE RATE	10A
ENERGY	4.07Wh
LITHIUM CONTENT	0.33 g
OPERATING TEMP RANGE [CHARGING]	0-45°C
OPERATING TEMP RANGE [DISCHARGING 0.2C]	-10-65°C
OPERATING TEMP RANGE [DISCHARGING 1C]	-10-65°C
RATED CAPACITY	1.1Ah
STANDARD CHARGE RATE	500mA (USB), External 1A/1C
CHARGE TIME FROM EMPTY [USB]	3 hours
STORAGE TEMP RANGE	23±5°C Recommended
WEIGHT	27 g

18350 Battery Charger Specification Requirements:

1. Use only a smart charger that uses a constant current/constant voltage charge cycle
2. Output of 4.2VDC, with charge current output of 0.5 to 2A



MIL-STD



THE WORLD'S FINEST ILLUMINATION TOOLS, SUPPRESSORS, & TACTICAL PRODUCTS®

18300 Mt. Baldy Circle, Fountain Valley, CA 92708 | 714-545-9444 | Fax: 714-545-9537 | surefire.com

Actual product may vary from photo. Prices and specifications subject to change without notice. | Export of the product(s) shown herein must comply with the appropriate U.S. Government Jurisdiction(s) and Regulation(s).